

ROADTHUNDER®

Wiring Configuration

La Configuración del alambrado, La Configuración del alambrado, Verdrahtende Konfiguration

RTS15-04




ROADTHUNDER®

RTS15-04

Parameters



Los parámetros, Paramètres, Parameter

- Fs: 25.7 Hz
- Qms: 5.252
- Cms: 0.170 mm/N
- Mms: 225.8 g
- Rms: 6.947 kg/s
- Vas: 5.834 ft³ (165.2 liters)
- Xmax: 0.46 in (10.67 mm)
- D: 12.875 in (327 mm)
- Sd: 130.2 in² (840 cm²)
- Vd: 59.88 in³ (0.885 liters)
- Qes: 0.705
- Re: 3.79 Ω
- Bl: 14.02 Tm
- Prms: 300 Watts
- Qts: 0.621
- η₀: 0.383%
- SPL₀: 88.1 dB
- SPL 2.83V/1m: 91.2 dB

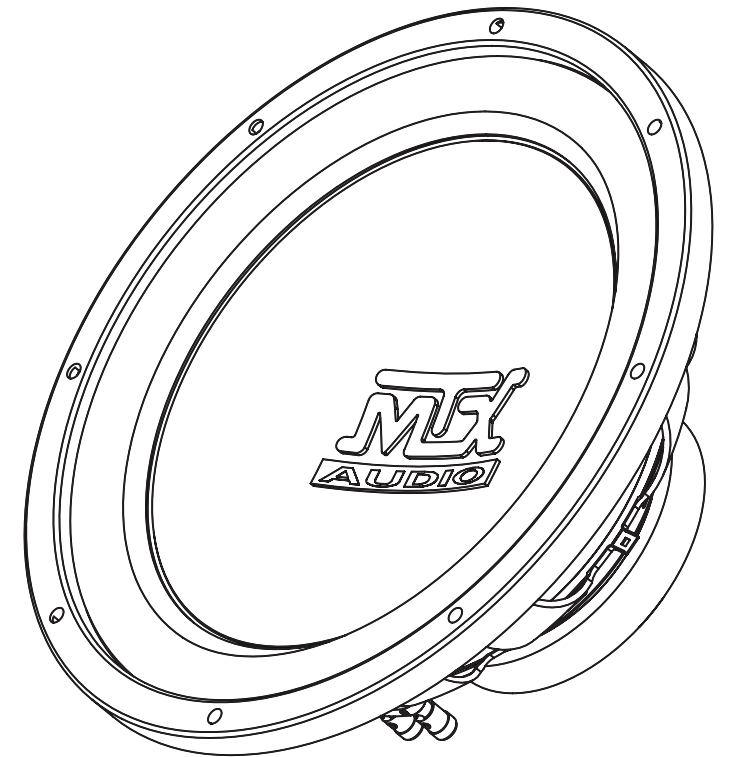


Specifications

Las especificaciones, Specifications, Spezifikationen

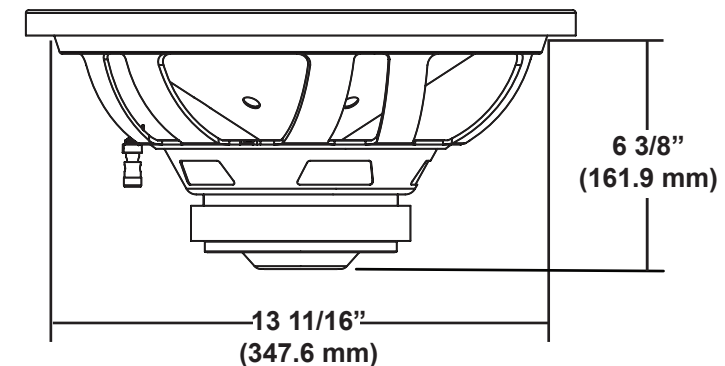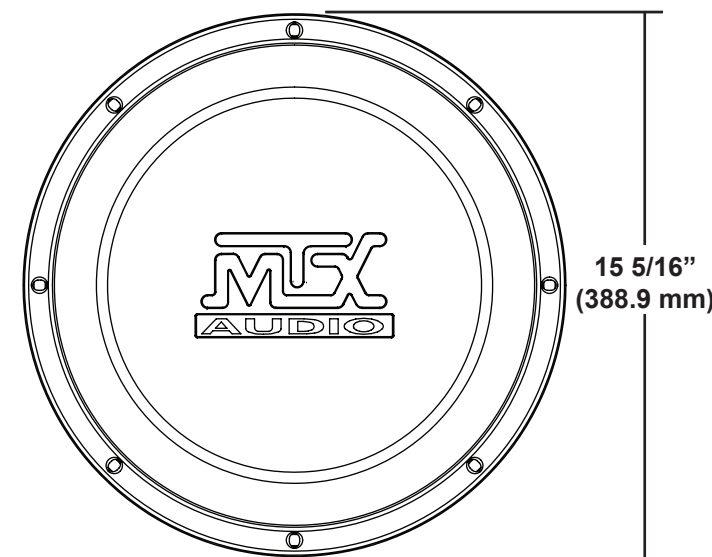

Recommended Power Rating of 150 - 300 Watts RMS


La Potencia nominal recomendada, Le Pouvoir recommandé Evaluant, Empfohlene Kraft Einzuschätze

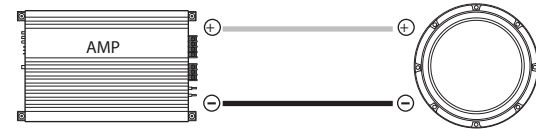

Wired Direct (Alambró Directo, Télégraphié Direct, Direkt hat verdrahtet)

A 4Ω speaker will represent a 4Ω load.


(Un orador 4Ω representará una carga 4Ω, Un 4Ω haut-parleur représentera un 4Ω chargent, Ein 4Ω Sprecher beladen eine 4Ω wird vertreten)

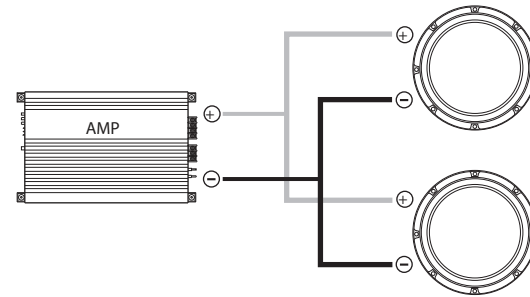

Two Speakers wired in parallel (Dos Oradores alambraron en la paralela, Deux Haut-parleurs ont télégraphié dans l'analogie, Zwei Sprecher haben parallel verdrahtet):

A 4Ω speaker will represent a 2Ω load.


(Un orador 4Ω representará una carga 2Ω, Un 4Ω haut-parleur représentera un 2Ω chargent, Ein 4Ω Sprecher beladen eine 2Ω wird vertreten)

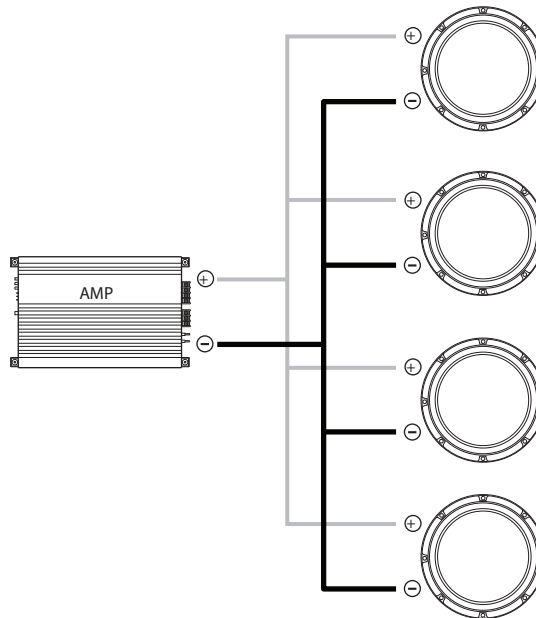

Four Speakers wired in parallel (Cuatro Oradores alambraron en la paralela, Quatre Haut-parleurs ont télégraphié dans l'analogie, Vier Sprecher haben parallel verdrahtet):

A 4Ω speaker will represent a 1Ω load.

(Un orador 4Ω representará una carga 1Ω, Un 4Ω haut-parleur représentera un 1Ω chargent, Ein 4Ω Sprecher beladen eine 1Ω wird vertreten)

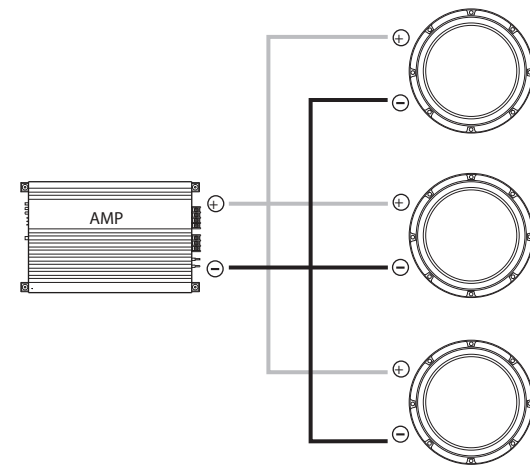

Three Speakers wired in parallel (Tres Oradores alambraron en la paralela, Trois Haut-parleurs ont télégraphié dans l'analogie, Drei Sprecher haben parallel verdrahtet):

A 4Ω speaker will represent a 1.3Ω load.



(Un orador 4Ω representará una carga 1.3Ω, Un 4Ω haut-parleur représentera un 1.3Ω chargent, Ein 4Ω Sprecher beladen eine 1.3Ω wird vertreten)

ROADTHUNDER®

Sealed Enclosure

El Cerco sellado, Cloture scellée, Abgedichtete Einschließung


For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.

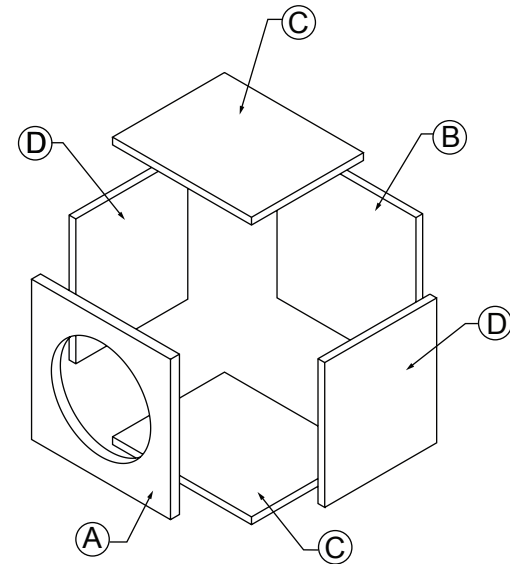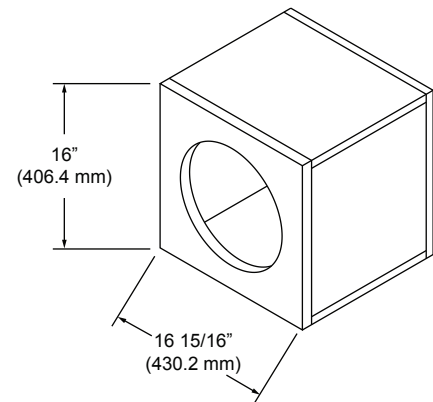


Net Internal Volume: 1.5 ft³

Parts List


La Lisat de partes, Liste de parties, Ersatzteilliste

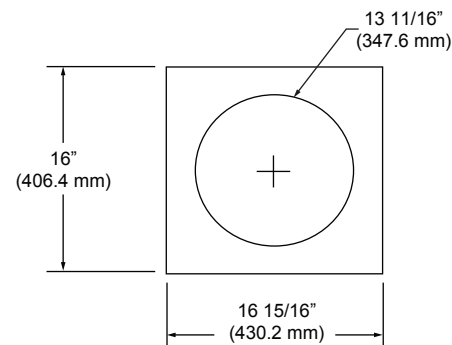


[A] - 3/4" (19 mm) MDF

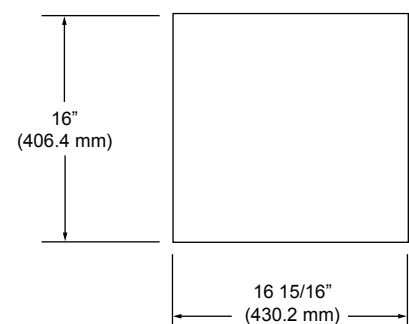

[B] - 3/4" (19 mm) MDF

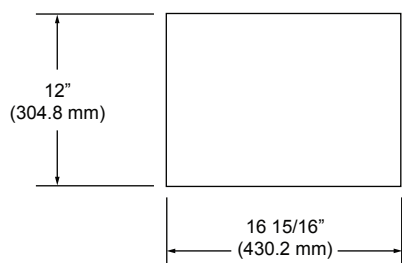

[C] - 3/4" (19 mm) MDF

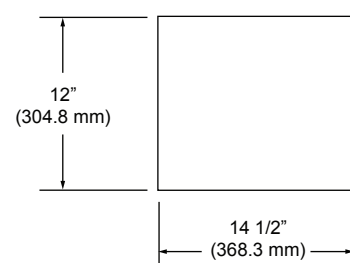

[D] - 3/4" (19 mm) MDF



RTS15-04

ROADTHUNDER®

Vented Enclosure

Descargar Cerco, Clôture donnere vent, Vented Einschließung


For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.

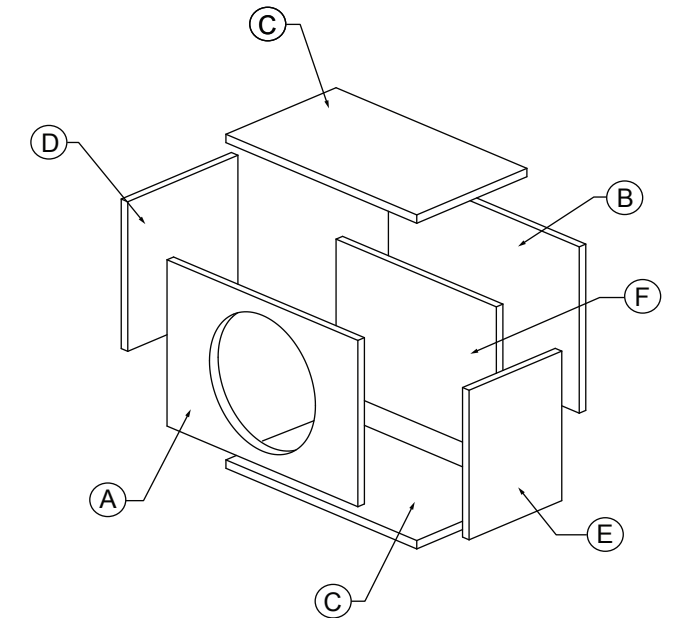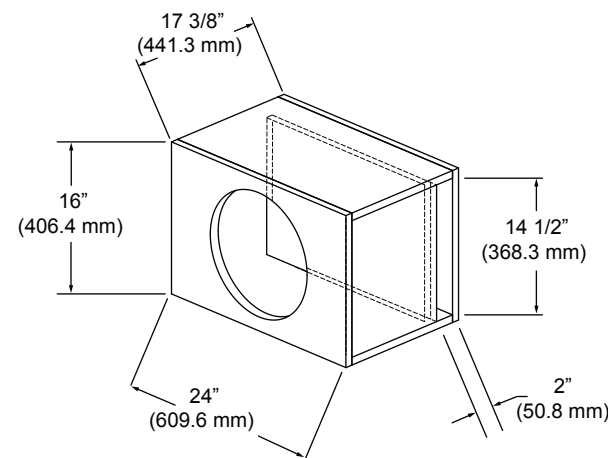


Net Internal Volume: 2.48 ft³

Parts List


La Lisat de partes, Liste de parties, Ersatzteilliste

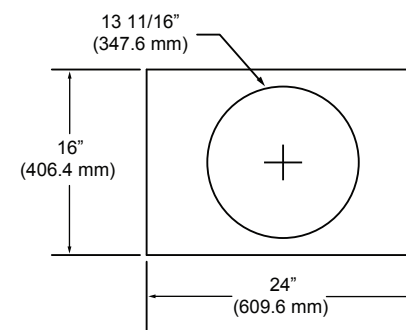


[A] - 3/4" (19 mm) MDF

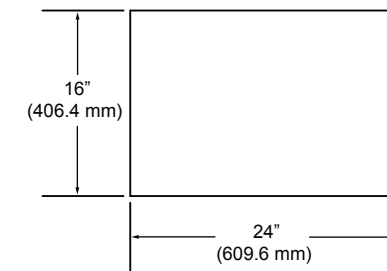


[B] - 3/4" (19 mm) MDF

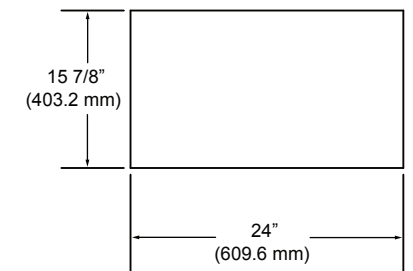


[C] - 3/4" (19 mm) MDF



[D] - 3/4" (19 mm) MDF



[E] - 3/4" (19 mm) MDF

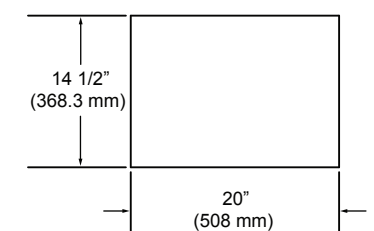

[F] - 3/4" (19 mm) MDF

RTS15-04