




# 9512-22

## 2400W Peak Power Subwoofer

### Parameters



Los parámetros, Paramètres, Parameter

Fs: 26 Hz  
Qms: 4.885  
Cms: 0.078 mm/N  
Mms: 477.9 g  
Rms: 16.26 kg/s  
Vas: 1.315 ft<sup>3</sup> (37.23 liters)  
Xmax: 1.25 in (31.75 mm)  
D: 10.72 in (272.2 mm)  
Sd: 90.06 in<sup>2</sup> (581 cm<sup>2</sup>)  
Vd: 114.42 in<sup>3</sup> (1.875 liters)  
Qes: 0.617  
Re: 0.93 ohm  
Bl: 10.87 Tm  
Prms: 1200 Watts  
Qts: 0.548  
n<sub>0</sub>: 0.105%  
SPL<sub>0</sub>: 84.7 dB  
SPL 2.83V/1m: 94 dB

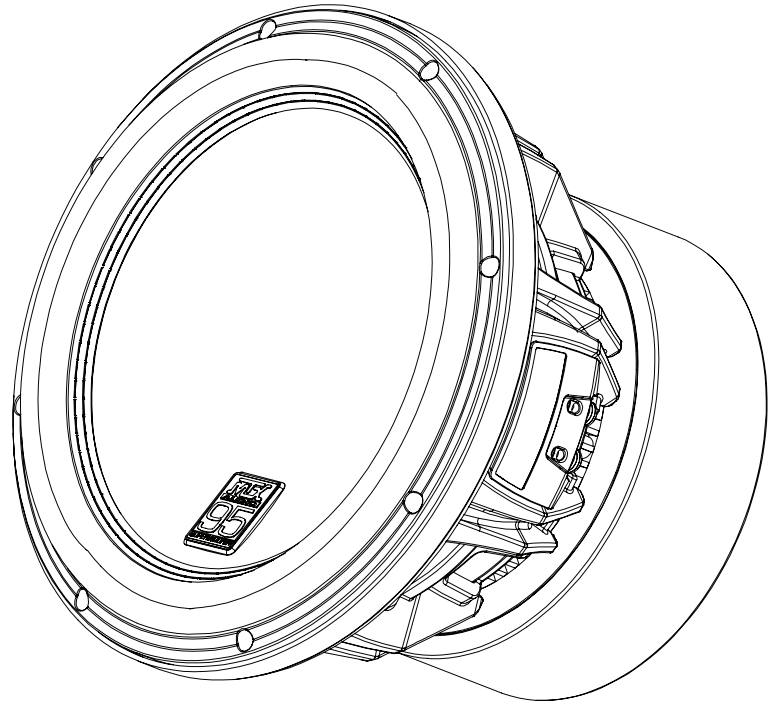

### Specifications

Las especificaciones, Specifications, Spezifikationen

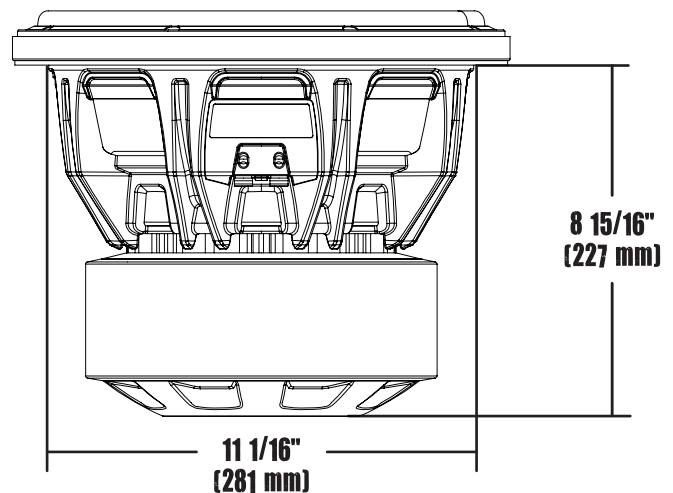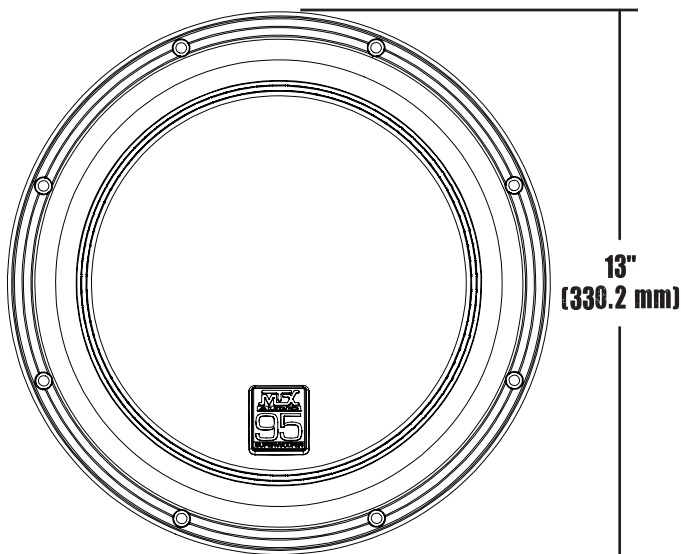


## Recommended Power Rating of 600 - 1200 Watts RMS

La Potencia nominal recomendada, Le Pouvoir recommandé Evaluant, Empfohlene Kraft Einzuschätze

# 9512-22 Recommended Enclosures



To take advantage of the 9512's chest pounding bass, MTX recommends the use of a vented enclosure for increased output. All recommended enclosures have been designed and thoroughly tested by MTX.

For additional enclosure designs check the MTX website. The barcode will take you to the box design page.



## Vented Tight Bass Enclosure



Descargar Cerco, Clătura doamere vent, Vented Einschließung

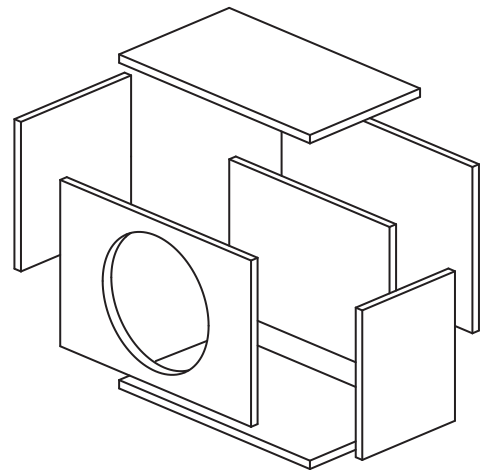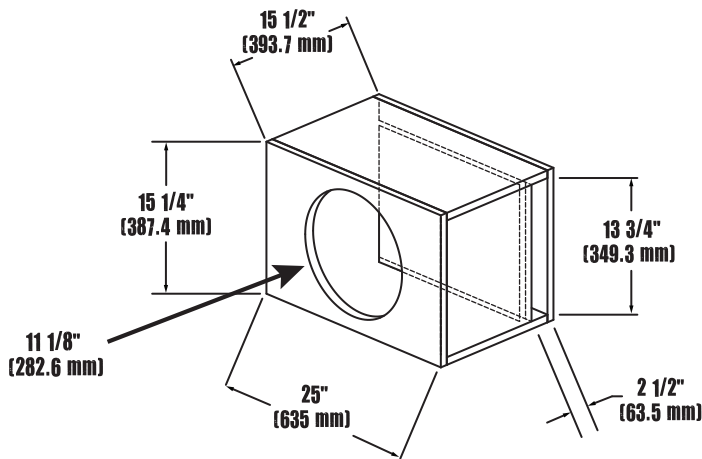

Net Internal Volume: 2.3 ft<sup>3</sup>  
Port length: 21" - 37Hz

## Vented Deep Bass Enclosure

Descargar Cerco, Clătura doamere vent, Vented Einschließung

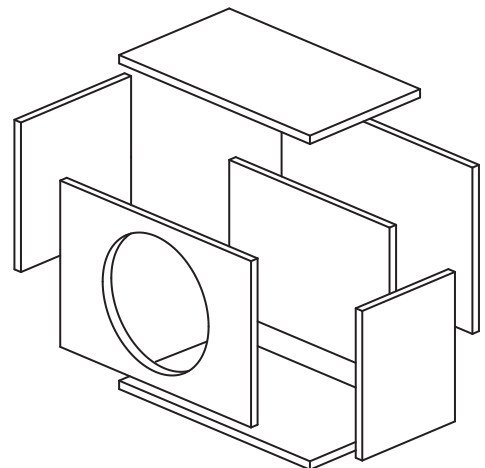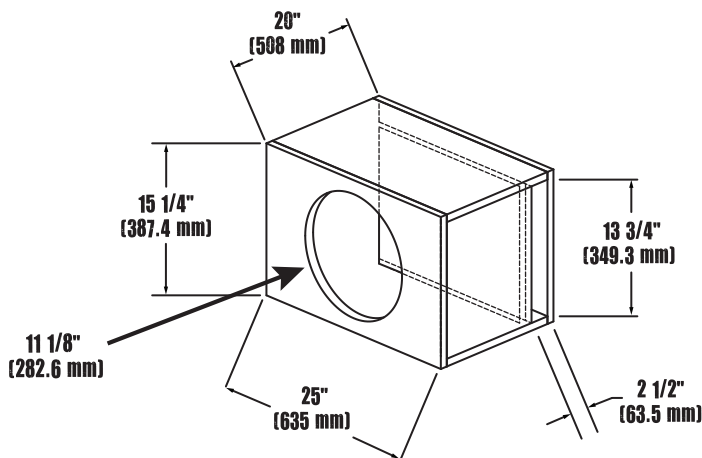

Net Internal Volume: 3.15 ft<sup>3</sup>  
Port length: 20" - 33Hz