




7515-22

1500W Peak Power Subwoofer

Parameters



Los parámetros, Paramètres, Parameter

Fs: 26 Hz
Qms: 5.61
Cms: 0.126 mm/N
Mms: 313 g
Rms: 8.66 kg/s
Vas: 5.114 ft³ (144.8 liters)
Xmax: 0.66 in (16.7 mm)
D: 13.32 in (338.4 mm)
Sd: 139.44 in² (899.6 cm²)
Vd: 91.66 in³ (1.502 liters)
Qes: 0.66
Re: 0.80 Ω
Bl: 7.77 Tm
Prms: 750 Watts
Qts: 0.59
n0: 0.372%
SPLo: 87.85 dB
SPL 2.83V/1m: 97.85 dB

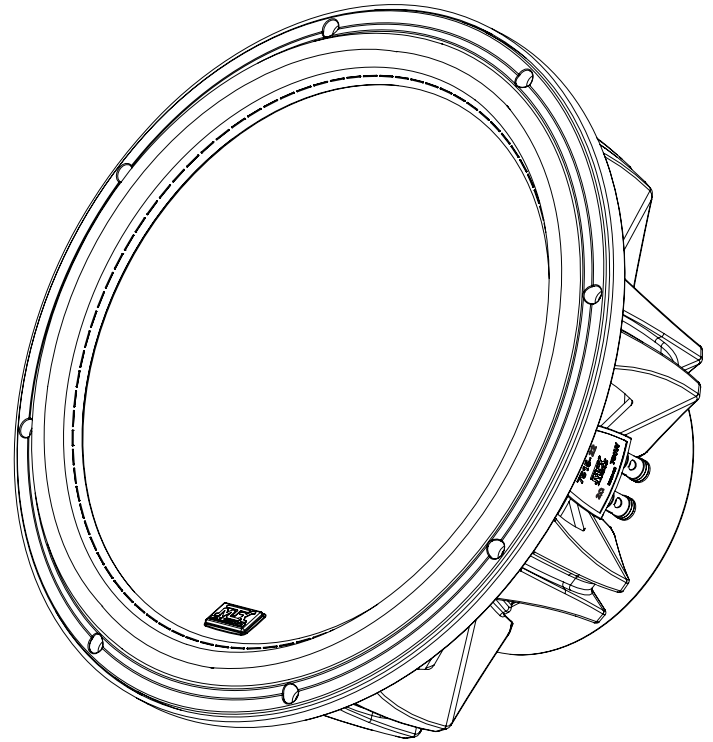

Specifications

Las especificaciones, Specifications, Spezifikationen

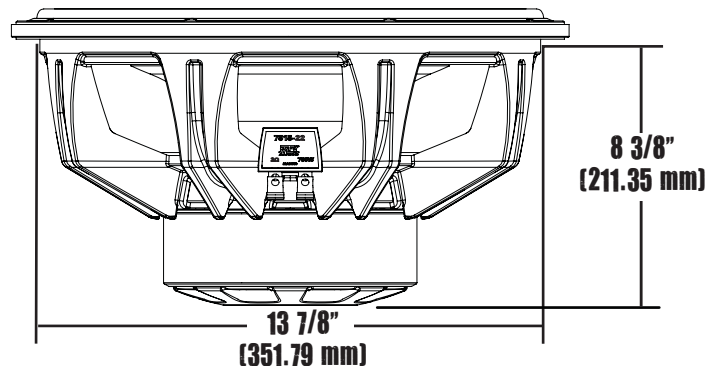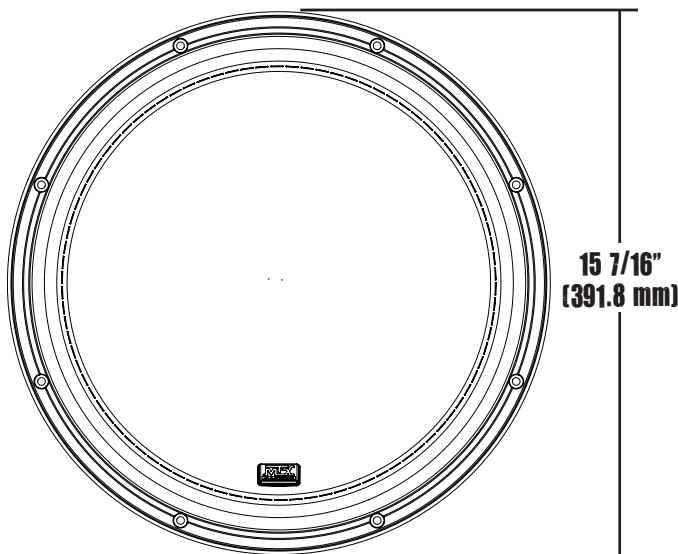


Recommended Power Rating of 375 - 750 Watts RMS

La Potencia nominal recomendada, Le Pouvoir recommandé Evaluant, Empfohlene Kraft Einzuschätze

7515-22 Recommended Enclosures



For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.

For additional enclosure designs check the MTX website, the barcode will take you to the box design page.



Sealed Enclosure



El Cerco sellado, Cloture scellée, Abgedichtete Einschließung

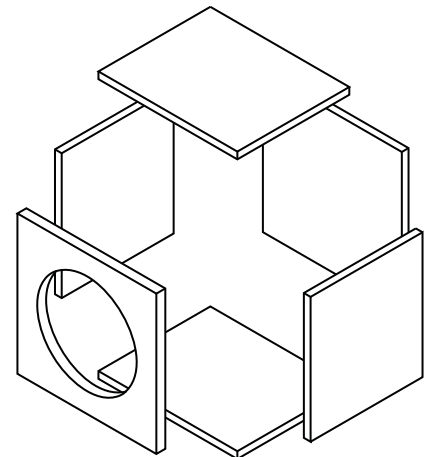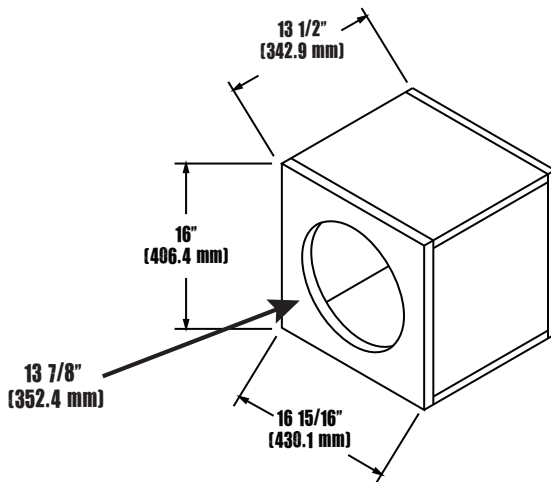

Net Internal Volume: 1.50 ft³

Vented Enclosure

Descargar Cerco, Cloture sonore vent, Vented Einschließung

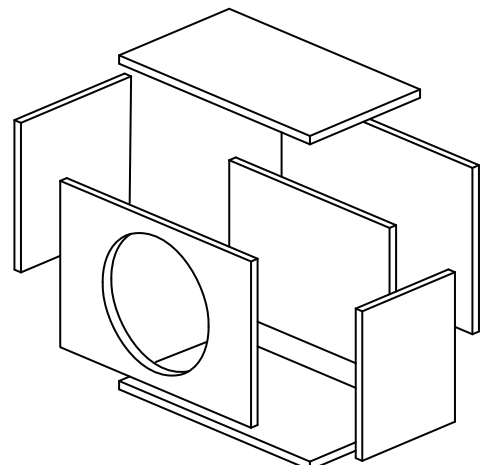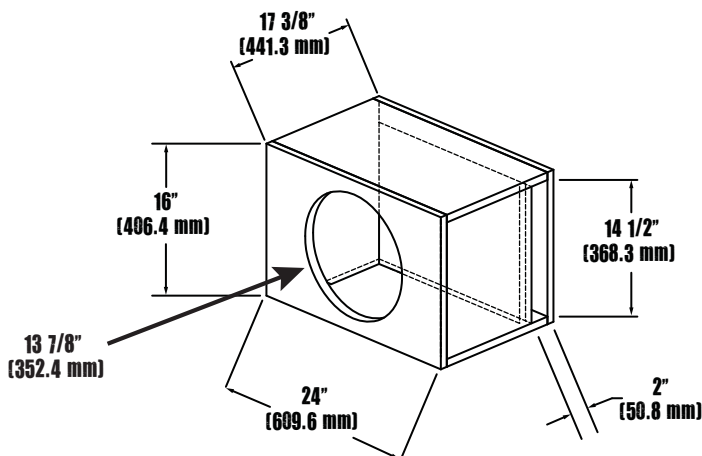

Net Internal Volume: 2.48 ft³
Port length: 20"