



T61544A Technical Data Report
Thunder 6000A 15" Dual 4 Ohm Subwoofer

Features - Características - Caractéristiques - Technische Informationen

Mica-filled polypropylene cone, with aluminum finish - Cono de aleación de Polipropileno con Mica - Cône polypropylene rempli de mica - Mika-gefüllter Polypropylen-Schalltrichter mit Aluminiumüberzug
8 Stiffening Ribs - 8 costillas de refuerzo - 8 nervures de renforcement - 8 Versteifungsrippen
Machine Turned Plates - Placas maquinadas - Plaques de champ fraisées - Maschinell geschliffene platte
Folded Window Basket - Canastilla en ventana doblada - Châssis embouti et replié - Gefalteter Fensterkorb
Black NBR Surround and Gasket - Perímetro y juntas de NBR negro - Contour et joint en NBR noir - Schwarze NBR-Sicke und Dichtung
Asymmetrical Linear Drive - Excitación lineal asimétrica - Asymmetrical Linear Drive System - Asymmetrisches, lineares Antriebssystem
Congruent Edge Technology - Tecnología de borde continuo - Technologie de pointe congruente - Kongruenzkantentechnologie
Polyimide Voice Coil Former - Formador de Bobina de Voz de poliamide - Gabarit de bobine de voix de polyamide - Polyamide Stimmformerspule
Spider Plateau Venting - Ventilación de la placa de la pieza de centrado - Aération plateau à croisillons - Zentriermembranplateau-Entlüftung
Flat Progressive Spider - Pieza de centrado progresiva plana - Spider Plat Progressif - Flache, progressive Zentriermembran

Specifications - Especificaciones - Données techniques - Spezifikationen



Free Air Resonance - Resonancia de atmósfera libre - Fréquence de résonance - Free Air-Resonanz	Fs	30.6 Hz
Volume Acoustic Suspension - Volumen de suspensión acústica - Volume équivalent à l'élasticité de la suspension - Äquivalenzvolumen	Vas	4.77 Ft^3 (135.0 l)
Total Q - Q total - Coefficient de surtension total - Gesamtgüte	Qts	.63
Electrical Q - Q eléctrica - Coefficient de surtension électrique - Elektrische Güte	Qes	.71
Mechanical Q - Q mecánica - Coefficient de surtension mécanique - Mechanische Güte	Qms	5.28
DC Resistance - Resistencia de CC - Résistance de la bobine au courant continu - Gleichstromwiderstand	Re	1.58 Ohm
Linear Excursion (One Way) - Excursión lineal (unidireccional) - Excursion maximum (dans un sens) - Lineare Auslenkung (eine Richtung)	Xmax	.37" (9.4 mm)
Effective Piston Diameter - Diámetro efectivo del pistón - Diamètre de la membrane - Effektiver Kolbendurchmesser	D	13.362" (.3394 m)
RMS Power Handling - Potencia máxima efectiva - Puissance RMS - Nennbelastbarkeits-Effektivwert	RMS	300 Watts
Recommended Amplifier Power - Potencia de amplificación recomendada - Puissance recommandée - Empfohlene Verstärkerleistung	RMS	75-300 Watts
Sensitivity 1W/1m - Sensibilidad - Efficacité 1W/1m - Empfindlichkeit	SPLo	90.2 dB
Reference Efficiency - Eficiencia de referencia - Efficacité de référence - Bezugswirkungsgrad	No	0.52%
Frequency Response - Respuesta de frecuencia - Réponse en fréquence - Frequenzgang		30 - 150Hz
Voice Coil Inductance - Inductancia de la bobina móvil - Inductance de la bobine mobile - Schwingspuleninduktivität	Le	0.7 mH
Gap Height - Altura del espacio - Hauteur de l'entrefer - Abstandshöhe		.314" (8.0 mm)
Voice Coil Height - Altura de la bobina móvil - Hauteur de la bobine - Schwingspulenhöhe		.955" (24.3 mm)
Voice Coil Diameter - Diámetro del Bobina móvil - Diamètre de la bobine - Schwingspuledurchmesser		2.0" (50.8 mm)
Magnet Weight - Imán - Poids de la structure magnétique - Magnet		54 oz (1531 g)
Motor Force - Fuerza motriz - Facteur force - Schwingkraft	BL	9.93 Tm
Compliance - Cumplimiento - Compliance - Compliance	Cms	.117 mm/N
Total Moving Mass - Masa total en movimiento - Masse totale en mouvement - Gesamte bewegte Masse	Mms	230.9 g
Moving Mass of Driver - Masa en movimiento del altavoz - Poids de la membrane - Bewegte Masse des Subwoofers	Mmd	215.2 g
Suspension Losses - Pérdidas de suspensión - Pertes dans la suspension - Aufhängungsverlust	Rms	8.40
Effective Surface Area - Área superficial efectiva - Surface de la membrane - Wirksame Oberfläche	Sd	140.2 in^2 (.0905m^2)
Mounting Diameter - Diámetro de montaje - Diamètre de montage - Einbaudurchmesser		13 7/8" (352.4 mm)
Overall Diameter - Diámetro total - Diamètre extérieur - Gesamtdurchmesser		15 3/8" (390.5 mm)
Mounting Depth - Profundidad de montaje - Profondeur de montage - Einbautiefe		6 5/8" (168.3 mm)
Overall Depth - Profundidad total - Profondeur totale - Gesamttiefe		7" (177.8 mm)
Speaker Displacement (Inside Box) - Desplazamiento del altavoz (caja interior) - Volume occupé par le haut-parleur (montage intérieur) - Lautsprecherverdrängung (im Gehäuse)		285in^2 (4.7 l)
Speaker Displacement (Outside Box) - Desplazamiento del altavoz (caja exterior) - Volume occupé par le haut-parleur (montage extérieur) - Lautsprecherverdrängung (außerhalb des Gehäuses)		175in^2 (2.9 l)

*Dual voice coil models measured with coils in parallel



T61544A Technical Data Report

Thunder 6000A 15" Dual 4 Ohm Subwoofer

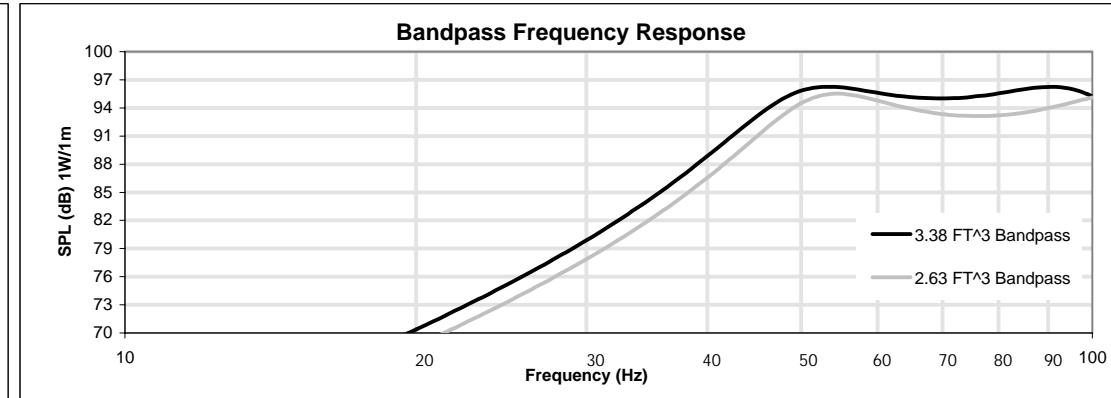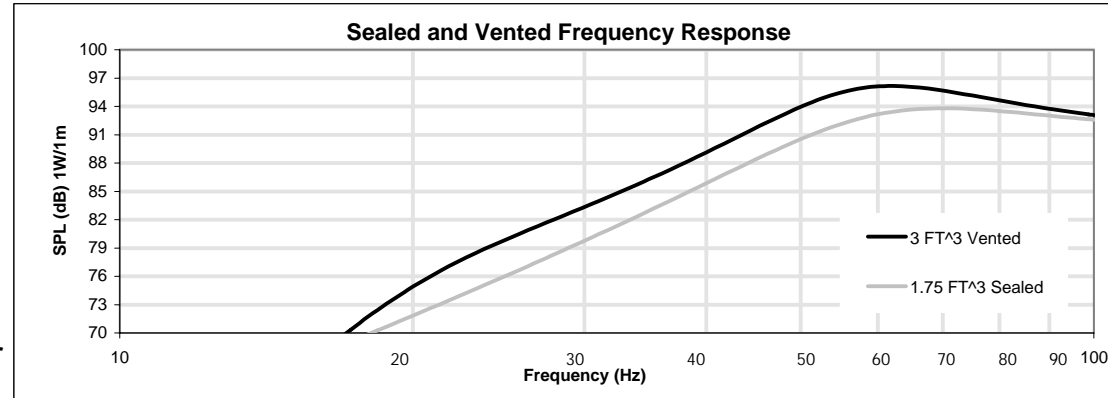

Sealed Enclosures - Gabinetes Sellados - Caissons Clos - Geschlossene Gehäuse

Enclosure Volume	1.50 Ft ³ (42.5 l)	1.75 Ft ³ (49.6 l)	2.00 Ft ³ (56.6 l)	2.25 Ft ³ (63.7 l)	2.50 Ft ³ (70.8 l)
F3	49 Hz	46 Hz	45 Hz	43 Hz	40 Hz
Ripple	1.23dB	1.22dB	1.17dB	1.11dB	1.04dB
Qtc	1.31	1.23	1.17	1.12	1.08
Net Volume	1.40 Ft ³ (39.6 l)	1.65 Ft ³ (46.7 l)	1.90 Ft ³ (53.8 l)	2.15 Ft ³ (60.9 l)	2.40 Ft ³ (67.9 l)
Driver Volume	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)
Excursion Limited SPL	118dB	118dB	117dB	117dB	117dB
Excursion Limited Power	300 Watts	300 Watts	300 Watts	300 Watts	300 Watts

Vented Enclosures - Gabinetes ventilados - Caissons Bass Reflex - Ventilierte Gehäuse

Enclosure Volume	3.00 Ft ³ (85.0 l)	3.25 Ft ³ (92.0 l)	3.50 Ft ³ (99.1 l)	3.75 Ft ³ (106.2 l)	4.00 Ft ³ (113.3 l)
Vent Dimensions	(2)4"x14"	(2)4"x13.5"	(2)4"x15"	(2)4"x15"	(2)4"x13"
F3	40 Hz	38 Hz	36 Hz	36 Hz	35 Hz
Tuning Frequency	37 Hz	36 Hz	33 Hz	32 Hz	33 Hz
Ripple	3.08dB	3.10dB	2.86dB	2.77dB	2.94dB
Net Volume	2.68 Ft ³ (75.9 l)	2.94 Ft ³ (83.2 l)	3.16 Ft ³ (89.6 l)	3.41 Ft ³ (96.7 l)	3.70 Ft ³ (104.7 l)
Driver Volume	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)
Vent Volume	.22 Ft ³ (6.2 l)	.21 Ft ³ (5.9 l)	.23 Ft ³ (6.6 l)	.23 Ft ³ (6.6 l)	.20 Ft ³ (5.7 l)
Excursion Limited SPL	120dB	120dB	119dB	119dB	119dB
Excursion Limited Power	300 Watts	300 Watts	300 Watts	300 Watts	300 Watts

Single Reflex Bandpass Enclosures - Gabinetes reflectores sencillos de paso de banda - Caissons Bandpass à une chambre reflex - Bassreflex-Bandpassgehäuse

s=0.4

Enclosure Volume	2.22 Ft ³ (62.9 l)	2.40 Ft ³ (68.0 l)	2.63 Ft ³ (74.5 l)	2.94 Ft ³ (83.3 l)	3.35 Ft ³ (94.9 l)
Bandpass	52 - 142	47 - 137	44 - 132	39 - 127	34 - 122
Bandpass Gain	5.1dB	4.0dB	2.8dB	1.5dB	.1dB
Vent Dimensions	(4)4"x8.75"	(4)4"x11"	(4)4"x13.5"	(4)4"x17"	(4)4"x21.25"
Tuning Frequency	87 Hz	82 Hz	76 Hz	70 Hz	64 Hz
Ripple	2.26dB	2.33dB	2.41dB	2.48dB	2.56dB
Sealed Volume	.66 Ft ³ (18.8 l)	.77 Ft ³ (21.8 l)	.91 Ft ³ (25.9 l)	1.11 Ft ³ (31.4 l)	1.38 Ft ³ (39.2 l)
Vented Volume	1.20 Ft ³ (33.9 l)	1.20 Ft ³ (33.9 l)	1.20 Ft ³ (33.9 l)	1.20 Ft ³ (33.9 l)	1.20 Ft ³ (33.9 l)
Driver Volume	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)
Vent Volume	.26 Ft ³ (7.4 l)	.34 Ft ³ (9.5 l)	.42 Ft ³ (11.9 l)	.53 Ft ³ (15.1 l)	.67 Ft ³ (19.1 l)
Excursion Limited SPL	121dB	120dB	119dB	118dB	117dB
Excursion Limited Power	300 Watts	300 Watts	300 Watts	300 Watts	300 Watts

Single Reflex Bandpass Enclosures - Gabinetes reflectores sencillos de paso de banda - Caissons Bandpass à une chambre reflex - Bassreflex-Bandpassgehäuse

s=0.5

Enclosure Volume	2.93 Ft ³ (83.0 l)	3.13 Ft ³ (88.6 l)	3.38 Ft ³ (95.7 l)	3.73 Ft ³ (105.6 l)	4.24 Ft ³ (120.1 l)
Bandpass	53 - 121	48 - 116	42 - 111	37 - 106	32 - 101
Bandpass Gain	7.0dB	5.9dB	4.7dB	3.4dB	1.9dB
Vent Dimensions	(4)4"x5.25"	(4)4"x7"	(4)4"x9"	(4)4"x11.75"	(4)4"x15.25"
Tuning Frequency	80 Hz	75 Hz	70 Hz	64 Hz	58 Hz
Ripple	1.15dB	1.20dB	1.25dB	1.30dB	1.35dB
Sealed Volume	.81 Ft ³ (23.0 l)	.95 Ft ³ (26.9 l)	1.14 Ft ³ (32.3 l)	1.40 Ft ³ (39.8 l)	1.80 Ft ³ (50.9 l)
Vented Volume	1.87 Ft ³ (52.9 l)	1.87 Ft ³ (52.9 l)	1.87 Ft ³ (52.9 l)	1.87 Ft ³ (52.9 l)	1.87 Ft ³ (52.9 l)
Driver Volume	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)	.10 Ft ³ (2.9 l)
Vent Volume	.15 Ft ³ (4.2 l)	.21 Ft ³ (5.8 l)	.27 Ft ³ (7.7 l)	.36 Ft ³ (10.2 l)	.48 Ft ³ (13.5 l)
Excursion Limited SPL	122dB	121dB	120dB	119dB	117dB
Excursion Limited Power	300 Watts	300 Watts	300 Watts	300 Watts	300 Watts

One Year Limited Warranty

MTX Loudspeakers purchased in the United States from an authorized MTX dealer are guaranteed against defects in material and workmanship for a period of ONE YEAR from the date purchased by the end user, and limited to the original retail purchaser of the product. Product found to be defective during that period will be repaired or replaced by MTX at no charge. This warranty is void if it is determined that unauthorized parties have attempted repairs or alterations of any nature. Warranty does not extend to cosmetics or finish. Before presuming a defect is present in the product, be certain that all related equipment and wiring is functioning properly. MTX disclaims any liability for other incurred damages resulting from product defects. Any expenses incurred in the removal and reinstallation of products are not covered by this warranty. MTX's total liability will not exceed the purchase price of the product. If a defect is present, your authorized MTX dealer may be able to effect repairs. Proof of purchase is required when requesting service, so please retain your sales receipt and take a moment to register your warranty on line @ www.mtx.com.